

635nm~640nm 50mW~60mW Fiber Coupled Laser Diode with Reflection Coating | Reflect 1064nm light

638nm 50mW Coaxial Pigtailed Diode Laser with 9um Fiber | Red LD module for Aiming Beam

WSLP-635-050m-9-B-R

Wavespectrum Laser Group



[www.wavespectrum-laser.com](http://www.wavespectrum-laser.com)

635nm Pigtailed Diode Laser    50mW/9um Fiber

[en.wavespectrum-laser.com.cn](http://en.wavespectrum-laser.com.cn)

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V <sub>r</sub>	2.0	V
Operating Temperature	T <sub>op</sub>	-10~+60	°C
Storage Temperature	T <sub>stg</sub>	-40~+85	°C
Lead soldering temperature (10 sec.)	T <sub>ls</sub>	260	°C
<b>Features:</b>	 <ul style="list-style-type: none"> <li>• 635nm</li> <li>• With 9um Fiber</li> <li>• With Reflection coating</li> <li>• B82 Package</li> </ul>		
<b>Applications:</b>	<ul style="list-style-type: none"> <li>• Medical Laser Treatment</li> <li>• Other</li> </ul>		
<b>Specifications</b>	<b>WSLP-635-050m-9-B-R</b>		
	Min	Type	Max
Center Wavelength@25°C	630nm	638nm	645nm
Spectral Width (FWHM)	----	2.0nm	----
Output Power	----	50mW	----
Fiber Type	SMF-28		
Fiber Core	9um		
Recommend Operating Temperature	25°C		
Fiber Connector	FC/SC/SMA905		
Fiber Length	----	80cm	100cm
Threshold Current	----	60mA	100mA
Operating Current	----	190mA	210mA
Operating Voltage	----	2.7V	3.3V
Package Style	B82		
Reflection ratio (1000nm~1100nm)	>99.9%		

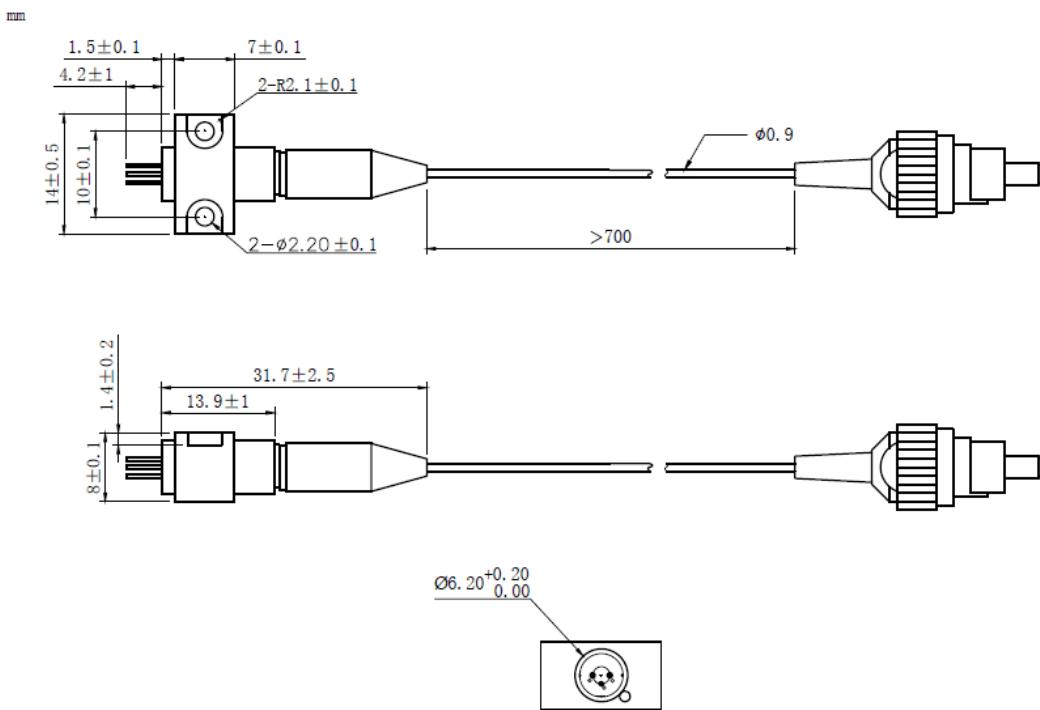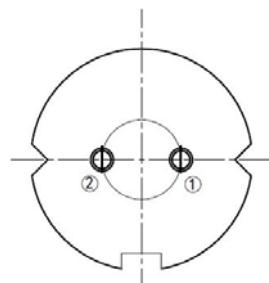

**B82 Package View:**

**PIN Bottom View:**


<b>1</b>	<b>LD(+)</b>
<b>2</b>	<b>LD(-)</b>

**Electrically shorten LD module and store in non-extreme conditions.**

Suggest using the constant current power supply.

