
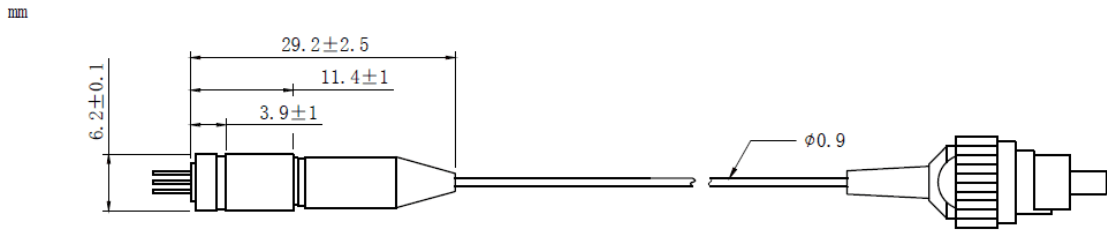

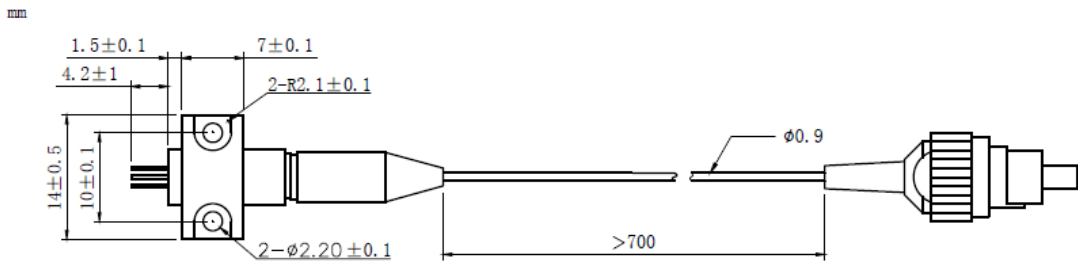
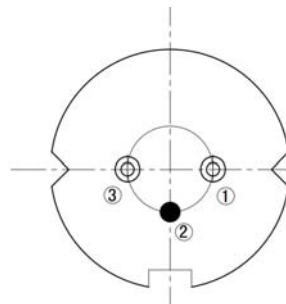


670nm 5mW SM Coaxial Pigtailed Laser Diode with SMF | 4um SMF| Built-in Photodiode| Heat-sink Optional
 670nm~675nm SM Fiber Coupled LD with Single Mode Fiber | With PD | Single Mode Beam
 WSLP-670-005m-4-PD Wavespectrum Laser Group www.wavespectrum-laser.com

670nm Pigtailed Diode Laser		5mW/SMF		en.wavespectrum-laser.com.cn	
PARAMETER	SYMBOL	VALUE		UNIT	
Reverse Voltage	V_r	2.0		V	
Operating Temperature	T_{op}	-10~+60		°C	
Storage Temperature	T_{stg}	-40~+85		°C	
Lead soldering temperature (10 sec.)	T_{is}	260		°C	
Features: <ul style="list-style-type: none"> • 670nm • With SM Fiber • Coaxial or B82 Package • Built-in PD 					
Applications: <ul style="list-style-type: none"> • Medical Laser Treatment • Others 					
Specifications		WSLP-670-005m-4-PD			
		Min	Type	Max	
Center Wavelength@25°C		±5nm	670nm	±10nm	
Recommended Operating Temperature		25°C			
Output Power		----	5mW	----	
Fiber Type		Single Mode Fiber			
Fiber Core		4um			
Monitor Current		----	0.5mA	----	
PD Reverse Voltage		----	----	30V	
Fiber Connector		FC/SC/SMA905			
Fiber Length		----	80cm	100cm	
Threshold Current (Typ.)		----	20mA	35mA	
Operating Current (Typ.)		----	38mA	45mA	
Operating Voltage		----	2.4V	3.0V	
Package Style		Coaxial or B82			
PD		Built-in			



Coaxial Package View: (Part Number: WSLP-670-005m-4-PD)

B82 Package View: (Part Number: WSLP-670-005m-4-B-PD)

PIN Bottom View:


1	LD(-)
2	LD(+)&PD(-)
3	PD(+)



Electrically shorten LD module and store in non-extreme conditions.
Suggest using the constant current power supply.

