


1060nm~1064nm 20mW SM Coaxial Pigtailed Laser Diode with 9um SM fiber

1064nm 20mW Fiber Coupled LD with SMF28 Fiber | Built-in Photodiode

WSLP-1064-020m-9-PD


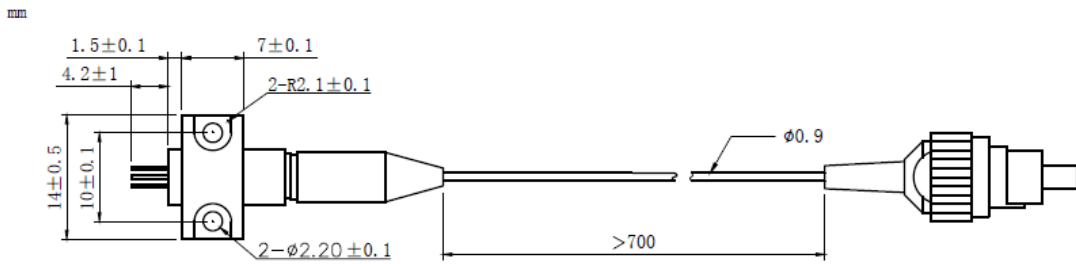
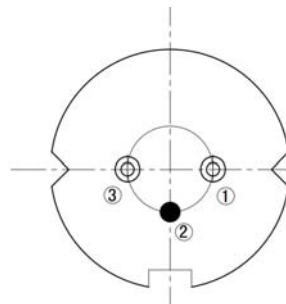
Wavespectrum Laser Group

www.wavespectrum-laser.com

1064nm Pigtailed Diode Laser		20mW/9um Fiber		en.wavespectrum-laser.com.cn	
PARAMETER	SYMBOL	VALUE		UNIT	
Reverse Voltage	V_r	2.0		V	
Operating Temperature	T_{op}	-10~+50		°C	
Storage Temperature	T_{stg}	-40~+85		°C	
Lead soldering temperature (10 sec.)	T_{is}	260		°C	
Features: <ul style="list-style-type: none"> 1064nm 9um Fiber Coaxial or B82 Package Built-in PD 					
Applications: <ul style="list-style-type: none"> Medical Laser Treatment Sensor Others 					
Specifications		WSLP-1064-020m-9-PD			
		Min	Type	Max	
Center Wavelength@25°C		±5nm	1064nm	±15nm	
Recommended Operating Temperature		25°C			
Output Power		----	20mW	----	
Fiber Type		SMF-28			
Fiber Core		9um			
Monitor Current		----	0.2mA	----	
PD Reverse Voltage		----	----	30V	
Fiber Connector		FC/SC/SMA905			
Fiber Length		----	80cm	100cm	
Threshold Current (Typ.)		----	20mA	45mA	
Operating Current (Typ.)		----	100mA	120mA	
Operating Voltage		----	1.8V	2.5V	
Package Style		Coaxial or B82			
Photodiodes		Built-in			



Coaxial Package View: (Part Number: WSLP-1064-020m-9-PD)

B82 Package View: (Part Number: WSLP-1064-020m-9-B-PD)

PIN Bottom View:


1	LD(-)
2	LD(+)&PD(-)
3	PD(+)



Electrically shorten LD module and store in non-extreme conditions.
Suggest using the constant current power supply.

