

850nm MM Laser Diode | 850nm MM LD | Multimode Laser | 5.6mm 3.8mm 9mm Package | PD Photodiode | TEC | FAC
 850nm~852nm~860nm | 500mW | TO18 TO5 TO3 COS C-mount E-mount HHL Window Package | Square Line Beam
 WSLD-850-500m-1 Wavespectrum Laser Group en.wavespectrum-laser.com.cn

850nm 500mW Multimode Laser Diode

Features:

- 850nm
- Multimode
- TO18 Package
- Without Photodiode

Applications:

- Medical Laser Treatment
- Biological Laser
- Others



WAVESPECTRUM offers high quality laser diodes, including single-mode laser diodes (SMLD) and multi-mode laser diodes (MMLD), according to different spot patterns. To ensure high quality requirements of laser diodes, we adopt the world's top laser chips for making each laser diode, and the laser diodes will undergo severe aging and various testing before sending to the customer. At present, our company can provide laser diode products with the wavelength range of 405nm ~ 1920nm, and the optical power range is from 10mW to 15W. The main package includes TO38, TO18, TO5, TO3, C-mount, E-Mount, COS and HHL window package. The PD backlight and TE Cooler is optional as per the customer's requirements.

WAVESPECTRUM can offer various wavelengths listed as below::

375nm, 405nm, 445nm/450nm, 465nm, 488nm, 505nm/510nm, 515nm/520nm/525nm, 633nm, 635nm/638nm/640nm/642nm, 650nm/658nm/660nm, 670nm, 685nm/690nm, 705nm, 730nm, 755nm/760nm/770nm, 780nm/785nm, 795nm, 800nm/808nm/810nm, 820nm/830nm, 840nm/850nm/860nm, 880nm, 905nm, 915nm, 940nm, 976nm/980nm, 1060nm/1064nm, 1210nm, 1270nm, 1280nm, 1290nm, 1310nm, 1330nm, 1350nm, 1370nm, 1390nm, 1410nm, 1430nm, 1450nm, 1470nm, 1490nm, 1510nm, 1530nm, 1550nm, 1570nm, 1590nm, 1610nm, 1625nm, 1650nm, 1720nm, 1900nm, 1920nm.

WAVESPECTRUM can provide a variety of laser products: single mode laser diode, multimode laser diode, single mode fiber coupling laser modules, polarization maintaining fiber coupled laser modules, multi-mode pigtailed laser modules, fiber detachable laser module, RGB white fiber coupled laser module, medical laser module, turnkey fiber coupled laser system, etc. The main packages for the lasers can be: TO18 | TO5| C-mount | TO3 | E-mount | H-mount | COS | 2-pin | 4-pin | 9-pin | 14-pin.

WAVESPECTRUM - welcome to inquire any time!

Please visit our Website for more info.: <http://www.wavespectrum-laser.com.cn/index.html>

MORE CHOICES, MORE IDEAS

Laser Diode	Fiber Coupled Laser Module	Fiber Receptacle LD	Laser System	RGB Pigtailed White Laser	Medical Laser Module
375nm	405nm	445nm	465nm	488nm	505nm
685nm	760nm	785nm	790nm	808nm	830nm
1064nm	1210nm	1270nm	1280nm	1290nm	1310nm
1470nm	1490nm	1510nm	1530nm	1550nm	1570nm
				1590nm	1610nm
				1625nm	1650nm
				1720nm	1720nm
				1900nm	1900nm
				1920nm	1920nm

WAVESPECTRUM LASER GROUP LIMITED

Email: sales@wavespectrum-laser.com.cn

Tel.: +86 22 8793 1118

Web.: <http://en.wavespectrum-laser.com.cn>




850nm 500mW Multimode Laser Diode


Part Number		WSLD-850-500m-1		
PARAMETER		SYMBOL	VALUE	UNIT OF MEASURE
Reverse Voltage		V _r	2.0	V
Operating Temperature		T _{op}	-10~+50	°C
Storage Temperature		T _{stg}	-40~+85	°C
Lead Soldering Temperature (10 sec.)		T _{is}	260	°C
Typical Specification (@25°C)		Min.	Typical Value	Max.
Optical Parameters	Center Wavelength	850nm +/- 10nm		
	Output Power	----	500mW	----
	Spectral Width(FWHM)	----	2.0nm	----
	Wavelength Temp. Coefficient	0.3nm/°C		
	Laser Type	FP		
	Beam Type	Multimode		
	Emitter Size	50um x 1um		
	Beam Divergence (FWHM)	----	35° +/- 10° //	----
	Slope Efficiency	----	0.7mW/mA	----
Electrical Parameters	Threshold Current	----	240mA	----
	Operating Current	----	950mA	----
	Operating Voltage	----	2.4V	----
Photodiode Parameters	Photodiode	Without		
	PD Current	----	---	---
	PD Reverse Voltage (Max.)	----		
Other Parameters	Package	TO18 (5.6mm)		
	Recommended Operating Temp.	25°C		

Product Package View:

TO18 (5.6mm) Package:

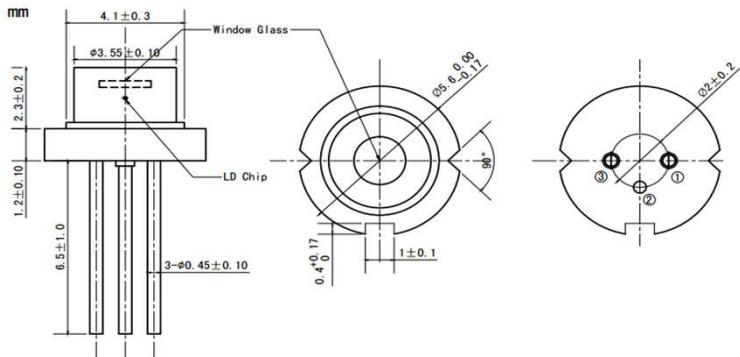

PIN Bottom View:



Pin-1	LD(-)
Pin-2	LD(+), CASE
Pin-3	LD(-)

