
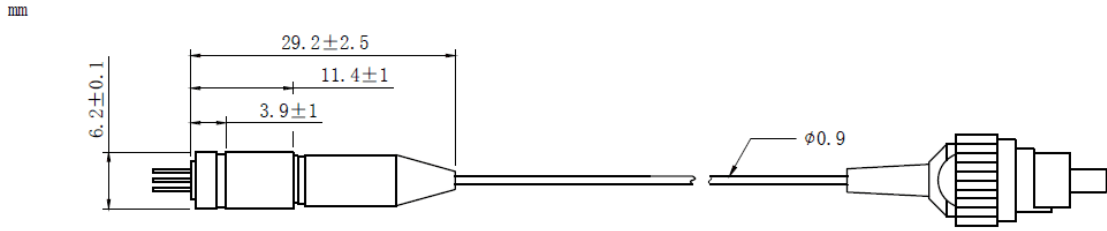

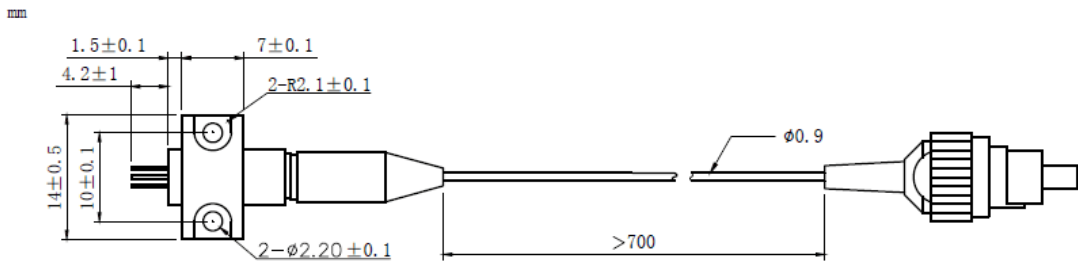



**850nm 70mW~80mW PM Fiber Coupled Laser Diode with Coaxial Package | Infrared LD Module**  
**850nm 70mW High Power Coaxial Pigtailed LD with Polarization Maintaining Fiber (PM Fiber)**  
 WSLP-850-070m-PM-PD      Wavespectrum Laser Group      www.wavespectrum-laser.com

850nm Pigtailed Diode Laser		70mW/PM Fiber		en.wavespectrum-laser.com.cn	
PARAMETER	SYMBOL	VALUE		UNIT	
Reverse Voltage	$V_r$	2.0		V	
Operating Temperature	$T_{op}$	-10~+60		°C	
Storage Temperature	$T_{stg}$	-40~+85		°C	
Lead soldering temperature (10 sec.)	$T_{is}$	260		°C	
<b>Features:</b> <ul style="list-style-type: none"> <li>● 850nm</li> <li>● PM Fiber</li> <li>● High Reliability</li> <li>● High Polarization Extinction Ratio</li> </ul> <b>Applications:</b> <ul style="list-style-type: none"> <li>● Biological Instruments</li> <li>● Analytical Equipment</li> <li>● Others</li> </ul>					
<b>Specifications</b>	<b>WSLP-850-070m-PM-PD</b>				
	Min	Type	Max		
Center Wavelength@25°C	840nm	850nm	860nm		
Recommended work Temperature	25°C				
Output Power	----	70mW	----		
Fiber Type	Polarization Maintaining Fiber				
Fiber Core	5um				
Polarization Extinction Ratio	13dB	15dB	----		
Monitor Current	----	0.3mA	----		
Fiber Connector	FC/APC				
Fiber Length	----	80cm	100cm		
Threshold Current (Typ.)	----	55mA	100mA		
Operating Current (Typ.)	----	220mA	240mA		
Operating Voltage	----	2.5V	3.0V		
Package Style	Coaxial or B82				
High Polarization Extinction Ratio (PER) Version Laser Module is also available, please contact us.					



**Coaxial Package View: (Part Number: WSLP-850-070m-PM-PD)**

**B82 Package View: (Part Number: WSLP-850-070m-PM-B-PD)**

**PIN Bottom View:**


1	LD(-)
2	LD(+)&PD(-)
3	PD(+)



Electrically shorten LD module and store in non-extreme conditions.  
Suggest using the constant current power supply.

