


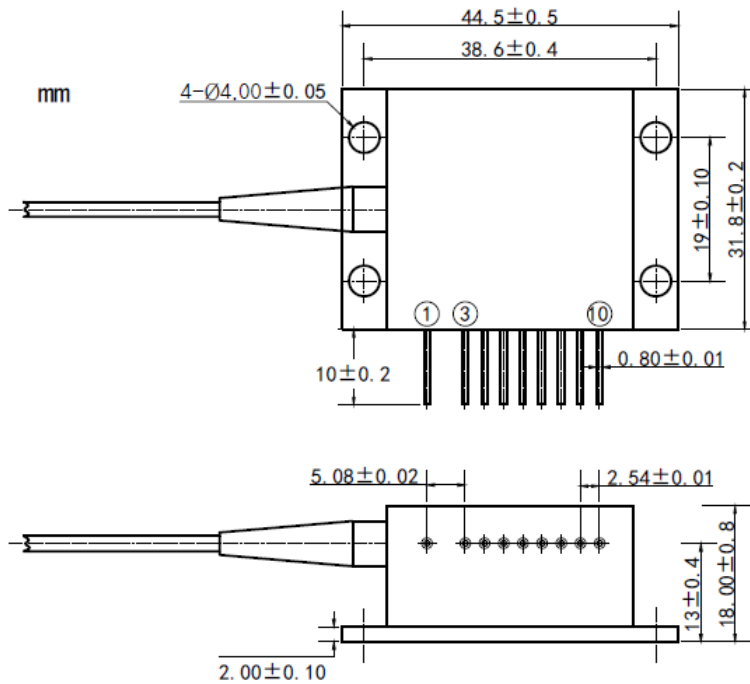
1470nm 2W~2.5W Fiber Coupled Laser Diode Module | Built-in TEC Cooler |9-Pin HHL Package
1470nm 2.5W|9-PIN Package| 105um 200um 400um Fiber Core| High Power Infrared LD | Built-in PD
WSLX-1470-2500m-M-H9-T-PD Wavespectrum Laser Group www.wavespectrum-laser.com

PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	V_r	2.0	V
Operating Temperature	T_{op}	+10 ~ +30	°C
Storage Temperature	T_{stg}	-20 ~ +80	°C
Lead soldering temperature (10 sec.)	T_{is}	260	°C

Features: <ul style="list-style-type: none"> ● 1470nm ● Multi-mode Fiber ● 9-Pin Package ● Built-in TEC Cooler ● Built-in Photodiode 	
Applications: <ul style="list-style-type: none"> ● Medical Laser Treatment ● Others 	

Specifications	WSLX-1470-2500m-M-H9-T-PD		
	Min.	Type	Max.
Center Wavelength@25°C	1470nm ± 30nm		
Spectral Width (FWHM)		10nm	
Output Power	2.0W	2.5W	-----
Temperature Coefficient of Wavelength		0.7nm / °C	
Threshold Current (Typ.)		0.5A	
Operating Current (Typ.)		10.0A	
Operating Voltage		2.0V	
Recommended Case Temperature	25°C		
TEC Max. Current		6A	
TEC Max. Voltage		9.8V	
Thermistor		10K	
Fiber Core Diameter	105um (200um 400um Optional)		
Fiber Length	>80cm		
Connector Type	SMA905/ST/FC		
Package Style	9-Pin		
Photodiode	Built-in		



9-Pin Package View:


PIN	FUNCTION
1	TEC (-)
2	-
3	CASE
4	LD (+)
5	THERM
6	THERM
7	LD (-)
8	PD (P)
9	PD (N)
10	TEC (+)

Wavespectrum offer Customized 1470nm Fiber Coupled LD.

- Customized Output Power
- Customized Fiber Core
- Dual-Wavelength or Tri-Wavelength Module Optional (such as 2w@1470nm+350mw@635nm)

Contact us with info@wavespectrum-laser.com

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.

