

**670nm 1W Fiber Coupled Laser Diode Module with 50um Multi-mode Fiber| Infrared LD Module**
**665nm~670nm 1W Pigtailed Diode Laser Module |2-Pin Package| 50um Fiber Core**
**WSLX-670-001-50M-H2**
**Wavespectrum Laser Group**
**en.wavespectrum-laser.com.cn**

PARAMETER	SYMBOL	VALUE	UNIT
MAX Reverse Voltage	$V_r$	2.0	V
Operating Temperature	$T_{op}$	+10 ~ +30	°C
Storage Temperature	$T_{stg}$	-20 ~ +80	°C
Lead soldering temperature (10 sec.)	$T_{is}$	260	°C

**Features:**

- 670nm
- 50um Fiber Core
- 2-Pin Package
- Long lifetime

**Applications:**


- Medical Laser Treatment
- Pumping
- Others


**Specifications**
**WSLX-670-001-50M-H2**

	Min	Type	Max
Center Wavelength@25°C	670nm±10nm		
Spectral Width (FWHM)	----	3nm	----
Output Power	----	1W	----
Temperature Coefficient of Wavelength	----	0.2nm / °C	----
Threshold Current (Typ.)	----	0.5A	1.2A
Operating Current (Typ.)	----	1.8A	2.0A
Operating Voltage	----	2.2V	2.6V
Slope Efficiency		0.9W/A	
Fiber Core Diameter	50um		
Fiber Numerical Aperture	0.22		
Fiber Length	>80cm		
Connector Type	FC (SMA905 Optional)		
Package Style	2-Pin-02		
Recommend Operating Temperature	25°C		



## 2-Pin-02 Package View

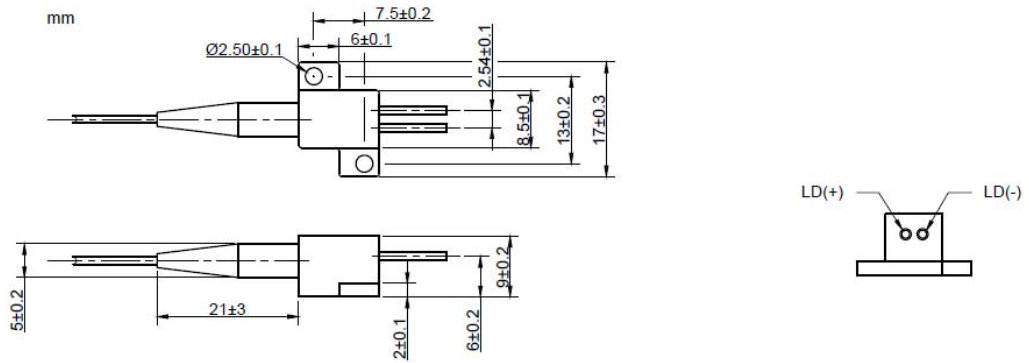

Wavespectrum offer **Customized 670nm Fiber Coupled LD.**

- Customized Output Power
- Customized Fiber Core
- **Dual-Wavelength or Tri-Wavelength Module Optional**(such as **12w@808nm+2w@670nm**)

Contact us with [info@wavespectrum-laser.com](mailto:info@wavespectrum-laser.com)

Electrically shorten LD module and store in non-extreme conditions.

Suggest using the constant current power supply.



Wavespectrum Laser Group  
[www.wavespectrum-laser.com](http://www.wavespectrum-laser.com)  
[sales@wavespectrum-laser.com](mailto:sales@wavespectrum-laser.com)

